

ScissorBot: Learning Generalizable Scissor Skill for Paper Cutting via Simulation, Imitation, and Sim2Real

Author Names Omitted for Anonymous Review. Paper-ID [16]

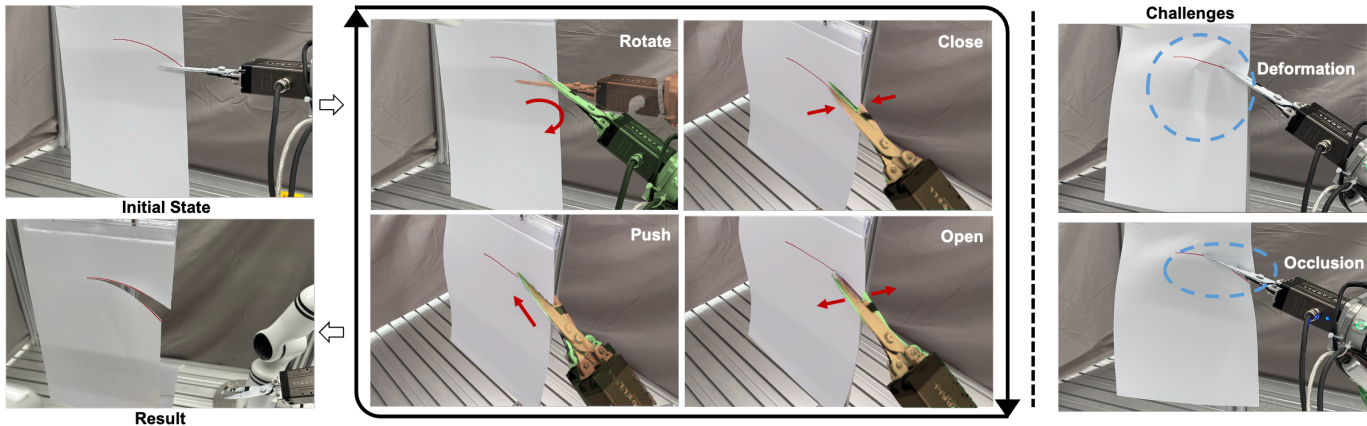


Fig. 1. **Robotic paper cutting with scissors.** **Left:** The objective is to drive scissors to accurately cut curves drawn on the paper, which is hung with the top edge fixed. **Middle:** Our execution follows an action primitive sequence, namely *Rotate*, *Close*, *Open*, *Push*. The meticulous action, visualized as scissors before (orange) and after (green) each action, ensures accurate cutting in the real world. **Right:** During execution, large deformation of paper and severe occlusion between scissors and target curves occasionally occurs. **Please refer to the video in the supplementary materials.**

Abstract—This paper tackles the challenging robotic task of generalizable paper cutting using scissors. In this task, scissors attached to a robot arm are driven to accurately cut curves drawn on the paper, which is hung with the top edge fixed. Due to the frequent paper-scissor contact and consequent fracture, the paper features continual deformation and changing topology, which is difficult for accurate modeling. To deal with such versatile scenarios, we propose ScissorBot, the first learning-based system for robotic paper cutting with scissors via simulation, imitation learning and sim2real. Given the lack of sufficient data for this task, we build PaperCutting-Sim, a paper simulator supporting interactive fracture coupling with scissors, enabling demonstration generation with a heuristic-based oracle policy. To ensure effective execution, we customize an action primitive sequence for imitation learning to constrain its action space, thus alleviating potential compounding errors. Finally, by integrating sim-to-real techniques to bridge the gap between simulation and reality, our policy can be effectively deployed on the real robot. Experimental results demonstrate that our method surpasses all baselines in both simulation and real-world benchmarks and achieves performance comparable to human operation with a single hand under the same conditions.

I. INTRODUCTION

Paper cutting, an ancient craft dating back to at least the 6th century [30], has evolved alongside human civilization, serving as a medium for emotional and symbolic expression [28]. In modern society, it has wide applications ranging from decorative art [31] and education to advanced manufacturing and technology [38, 6]. Humans can use scissors to perform paper cutting, showcasing their dexterity in tool usage. How-

ever, robots have yet to master this generalizable cutting skill, which indicates using scissors to cut painted patterns on paper with visual observation. The main obstacle lies in the intricate interaction between paper and scissors, characterized by the continual deformation and changing topology of the paper. Accurately modeling this dynamics based on first principles and achieving precise control using Linear Quadratic Regulator or Model Predictive Control is highly challenging. In contrast, learning-based methods, benefiting from data-driven, offer a promising alternative without the need for explicit modeling of this complex system and have the potential to achieve generalization across diverse cutting tasks.

Despite the strengths of learning-based approaches for many robotic tasks [4, 41, 35, 32], they fall short on this task partly due to the following challenges. First, there is insufficient data for paper-cutting tasks so far. Collecting accurate scissor-cutting demonstrations directly on a real-world robot system is laborious and hazardous, making simulation essential for data generation. However, existing simulators for thin-shell objects [33, 12, 3] do not support detailed interaction with scissors including contact and consequent fracture. Second, learning a generalizable and accurate scissor policy is intrinsically difficult for this paper cutting task. Given its contact-rich and deformable nature, even millimetric movements of the scissors can induce significant bending (as illustrated in Fig. 1) or lead to curves deviating substantially from the intended target. Meanwhile, the scissors occasionally occlude the target

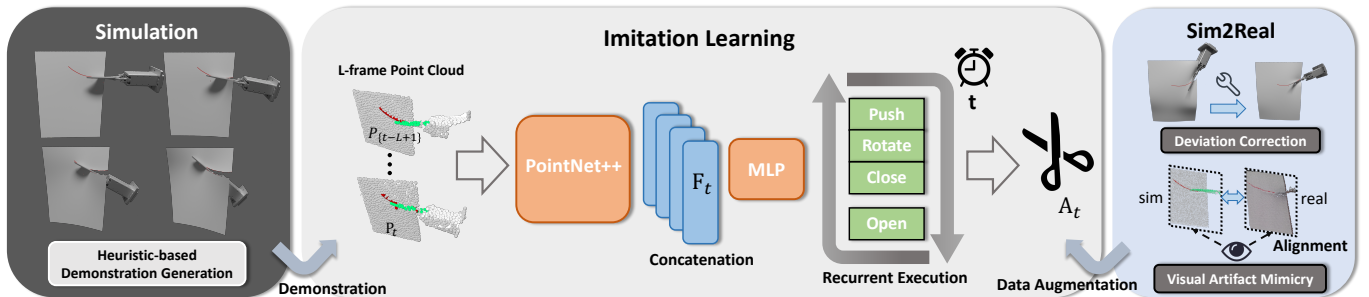


Fig. 2. **An overview of the learning system.** The system first generates expert demonstrations in our built simulation which supports interactive fracture of the paper. These demonstrations are then used to train a vision-based imitation learning policy that inputs multi-frame point clouds (Blade point cloud is highlighted in green only for visualization) and outputs parameters of action primitive. Meanwhile, Deviation Correction and Visual Artifact Mimicry provide data augmentation to imitation learning which ensures a robust transfer from simulation to real world.

curve, leading to an ill-posed decision-making problem. In this scenario, reinforcement learning methods struggle with poor data efficiency. Third, the significant sim-to-real gap, both physical and visual, hinders the deployment of the policy in the real world. The physical gap, arising from the complex factors in the real world, sometimes leads to deviations in the cutting trajectory during execution. Additionally, the visual gap for this task is mainly due to the *edge bleeding artifact* [20], where real-world sensor depth blurs at object edges. This blurring causes jittery observations of the scissor-paper interaction, leading to incorrect policy decisions.

To address the above challenges, we introduce ScissorBot, the first learning-based robotic system for paper cutting with scissors via a combination of simulation, imitation learning and sim2real techniques. To mitigate the data scarcity issue, we develop PaperCutting-Sim, a paper-cutting simulator supporting interactive fracture coupling with scissors, enabling large-scale demonstration generation with a heuristic-based oracle policy. This oracle policy leverages privileged information that is inaccessible in the real world, allowing us to distill its knowledge into a vision-based imitation learning policy. To handle tasks of significant complexity with improved efficiency, we customize an action primitive sequence which constrains the action space of learning and allivating potential compounding errors. We also use multi-frame point clouds as input to complete the occluded and underlying dynamics information. To bridge the physical and visual gaps between simulation and reality, we propose data augmentation on deviation correction and artifact mimicry, respectively. The former method can adaptively correct compounding errors via adding out-of-distribution data which pairs deviation states with corresponding correction action. The latter aims to mimic edge bleeding artifact in the simulation to achieve visual alignment with reality.

Through extensive simulated and real-world experiments, we evaluate the efficacy and generalizability of our learning policy across three different task difficulty levels: *Easy*, *Middle*, and *Hard*. Our method improves cutting accuracy by at least fivefold compared to the best alternative methods, as measured by Chamfer distance. Furthermore, despite training only on *Easy* data from simulation, our method achieves a Chamfer distance of 2mm and an IoU of 89 for *Middle* and *Hard* patterns in the real world, a performance that is comparable to humans with single-hand operation. Our

research opens up new opportunities for contact-rich and fine manipulation of deformable objects.

II. RELATED WORK

A. Deformable Object Manipulation

The manipulation of deformable objects, such as dough [13, 14], cloth [25, 35] and rope [5, 12] has been extensively studied in the scientific and engineering disciplines. Zhao et al. [40] train robots in the real world to learn paper-flipping skills, and Namiki et al. [18] explore paper folding using motion primitives. Other studies focus on kirigami [29, 15], the traditional art of folding and cutting paper to create intricate designs. For paper cutting, these studies typically use desktop cutting plotters rather than fully automated robotic systems. Additionally, various robotic systems have been developed for cutting deformable objects in different domains, such as vegetables [16, 17], dough [13, 14], and soft objects with rigid cores [37]. However, these systems generally employ tabletop knife cutting, which differs from our approach of using scissors for cutting.

B. Simulation Environments for Paper Cutting

One line of works build simulators to boost robotic skill learning for thin-shell materials [12, 3, 7, 33], however they couldn't simulate the fracture during the scissors cutting. Some works focus on simulating the cutting process of soft materials [9, 37]. Other works studies paper fracture process either from the theoretical analysis [19, 27], re-meshing algorithm [21, 36] or its application in kirigami [24, 39]. Overall, none of the existing works implements the paper cutting simulation for robot learning, which combines dynamic modeling of paper and interactive fracture interweaving paper remeshing according to scissor motion.

C. Imitation Learning

Imitation Learning (IL) [22, 4, 41, 2] is a supervised learning methodology for training embodied agents using expert demonstrations. The commonly used Behavior Cloning (BC) [22] strategy directly trains the policy to imitate expert actions. Despite its simplicity, this approach has demonstrated remarkable effectiveness in robotic manipulation [34, 26]. In this paper, we adopt imitation learning and utilize action primitive sequence to ensure robustness during execution.

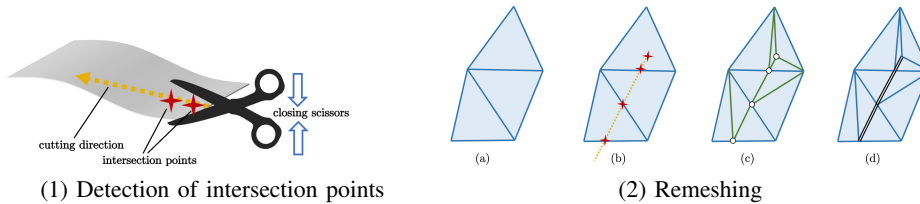


Fig. 3. **Interactive Fracture in our PaperCutting-Sim.** (1): As the scissors close, the fracture occurs along the cutting direction. Intersection points (**red star**) can be computed from edge-edge detection and vertex-face detection between the cutting direction (**orange dashed**) and the paper mesh. (2): (a) The original paper mesh (**blue triangles**). (b) Intersection point (**red star**) and cutting direction (**orange dashed**). (c) According to the intersection points, new vertices are added on the existing edges and the endpoint is inserted inside the triangle. The new edges (**green solid**) are connected between the new inserted vertex and the opposite vertex in the triangle. (d) The edges between these newly added vertices are split into two pieces (**black solid**).

III. METHOD

A. Task Formulation and Method Overview

The objective of this task is to accurately cut paper along drawn curves using scissors, guided by single-view point cloud input. The scissors are mounted on a single robotic arm, with the top edge of the paper fixed and the bottom edge free, enabling generalization to various scenarios.

In order to learn such generalizable scissor skills, we introduce ScissorBot, a robotic system designed to learn visuo-motor policies via simulation, imitation learning and sim2real techniques. As the system depicted in Fig. 2, we first present our training data source in Sec. III-B, where we develop the first paper-cutting simulator, PaperCutting-Sim, and heuristic-based demonstrations generation in Sec. III-C. We then detail the vision-based imitation learning design in Sec. III-D and sim2real techniques in Sec. III-E. Finally, we present a hardware setup for deploying our policy in real-world scenarios in Sec. III-F.

B. PaperCutting-Sim

We build a paper-cutting simulator, PaperCutting-Sim, to support the modeling of both paper and scissors, as well as their contacts and the consequent fracture. The simulator is implemented in Python and Taichi [10], which supports parallel computation on GPUs.

Dynamic Model. Following the Kirchhoff-Love shell theory, we model the elastic energy of the paper as the sum of stretching elastic energy and bending elastic energy. The stretching elastic energy is modeled as co-rotational linear elasticity, and the bending elastic energy is calculated using squared difference of mean curvature [8]. We perform spatial discretization using the Finite Element Method [21], and update positions and velocities through implicit time integration [1], which optimizes the incremental potential via Newton’s method. To model the contact between the paper and the scissors, we represent the scissors using a signed distance field, utilize the cubic of the signed distance to calculate collision energy, and apply Coulomb friction.

Interactive Fracture. Different from cutting simulation with predefined fracture surfaces [9], interactively handling fracture coupled with contact is a non-trivial problem. To address this, we design a two-phase geometry-based approach, as illustrated in Fig. 3. First, during the closing process of the scissors, we propose using edge-edge detection and vertex-face detection to detect the intersection points between the cutting trajectory and the paper mesh. Then these intersection points

are added to the paper mesh and related edges are connected and split according to the vertex position relationship inside triangles. We refer the reader to Appendix B for more details.

C. Demonstration Generation

In this section, we devise an action primitive sequence and a heuristic-based Oracle policy for large-scale demonstration generation. For distillation, we preserve high-quality demonstrations measured by chamfer distance.

Action Primitive Sequence. We designed four action primitives for the scissors in a heuristic manner, namely *Open*, *Push*, *Rotate*, and *Close*. These primitives can be combined into a sequence to cut a straight line on the paper as follows: (1) Open the scissors to the maximum extent. (2) Push the scissors to the starting point of the line. (3) Rotate the scissors towards the endpoint of the line. (4) Close the scissors breaking the paper. Note that the pushing action is a 1D translation along the cutting direction as we approximate that the starting point is in the scissor cut direction.

Oracle Policy. The oracle policy initially discretizes the target smooth curve into several line segments, with this approximation scarcely impacting visual appearance. Subsequently, the entire curve can be cut by multiple action sequences for line segments iteratively. As oracle policy can access the 3D position of target line during each step, the pushing distance ($p \in \mathbb{R}^1$), rotation matrix ($\mathbf{R} \in \text{SO}(3)$), and closed angle ($c \in \mathbb{R}^1$) can be computed by relative position between scissors and target line. Please refer to Appendix B for more details.

D. Vision-based Imitation Learning

This section presents the design of our learning framework, with multi-frame point clouds as input and action parameters as output. The complete network architecture is depicted in Fig. 2.

Spatial-Temporal Observation Encoding. We first pre-process raw single-view point cloud using bounding-box cropping and FPS sampling. Then sequential L -frame point clouds $\{P_{t-i-1}\}_{i=1}^L$, along with a binary mask indicating whether a visible point originates from the target curve, are fed into a shared PointNet++ encoder [23] to obtain features $\{\mathcal{F}_{t-i+1}\}_{i=1}^L$. These features are concatenated and passed through a shallow MLP to regress actions parameters.

Primitive Learning. In contrast to selecting the direct 7 DoF scissor pose as our output action space, the output action parameters are associated with the designed action primitives mentioned in Sec. III-C. These actions are recurrently executed

for each stage which keeps the order of *Push*, *Rotate*, *Close*, *Open* repeatedly. We employ Mean Squared Error (MSE) loss for the *Push* and *Close* terms, and 9D L1 Loss [11] for *Rotate*. The overall loss is formulated as:

$$\mathcal{L} = \lambda_p(p - \hat{p})^2 + \lambda_c(c - \hat{c})^2 + \lambda_R \sum_{i,j} |\mathbf{R}_{ij} - \hat{\mathbf{R}}_{ij}| \quad (1)$$

where λ_p , λ_c , λ_R are respective weights, and \hat{p} , \hat{c} , $\hat{\mathbf{R}}$ are ground truth action values.

E. Sim-to-Real Transfer

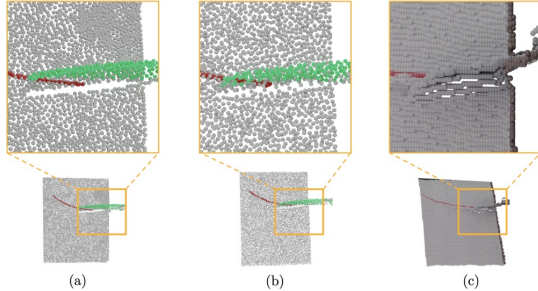


Fig. 4. **Visualization of Visual Artifact Mimicking** (a) Perfect point cloud in simulation with scissors blade highlighted (**green points**) (b) Point cloud with our proposed visual alignment. (c) Point cloud captured in the real world with ghost noise.

Deviation Correction. We introduce deviation correction to enhance the robustness for drifting scenarios which sometimes occurs in the real world. In this approach, we fine-tune the trained model using correction data, which comprises out-of-distribution states paired with corrective actions. These data are generated by introducing random rotation perturbances to the action during oracle policy execution. As the oracle policy consistently cuts towards the endpoint of each line segment, the next action naturally corrects minor drifting errors.

Visual Artifact Mimicry. We propose a simple yet effective method to mimic *edge bleeding artifact* in the simulation. To create continuous value at the edge between foreground and background in simulated depth image, we preprocess the depth with an average pooling kernel and add random noise perpendicular to the surface of the paper to the point cloud of the blade. In this way, the artifact can be mimicked (Fig. 4(b)) in our training data thus reaching a visual alignment from simulation to reality.

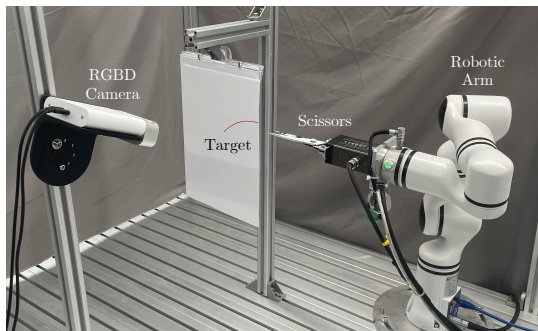


Fig. 5. The real-world experiment setup.

F. Hardware System Design

We design a hardware system for the paper-cutting task, as Fig. 5 shown. The setup includes a Realman robot equipped with a scissor extension for manipulation and a single Kinect DK camera to capture RGBD observations. To secure the paper, we use plastic clips to fix the top edge, leaving the lower edge free. The target curves are drawn in red on white paper, with corresponding binary masks obtained through simple RGB-based segmentation. We use A4 printer paper (210 mm \times 297 mm, 75 g/m²) as the material for the following experiments.

IV. EXPERIMENTS

In this section, we first evaluate the cutting performance of our proposed method through comparison with various baselines and variants in simulated environments. We further validate our approach in the real-world. Please refer to Appendix A for ablation studies and more qualitative results.

A. Benchmark

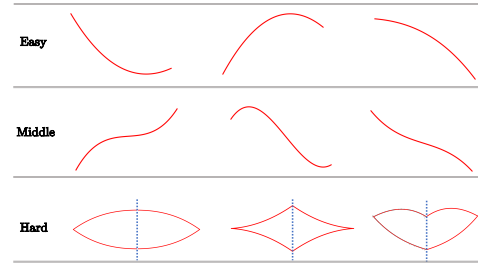


Fig. 6. Example curves for Easy, Middle and Hard tracks. For Hard track in the real world, the whole pattern is cropped on an origami sheet.

Task Datasets. We focus on simple smooth curve cutting and split it into three distinct tracks, illustrated in Fig. 6. In each track, curves are generated using Bézier curves parameterized by four control points. By manipulating the positional relationship of these control points, we can control the second-order derivative of the curve, which in turn determines the complexity of the scissors' motion. The discussion on non-smooth and non-simple curves can be found in the Sec. V.

- *Easy*: In this track, the second-order derivatives of curves are consistently positive or negative.
- *Middle*: Curves in this track exhibit varying positive and negative second-order derivatives.
- *Hard*: This track comprises several patterns, each composed of two curves from the *Easy* track. In real-world settings, this track can be further required to cut the origami sheet to obtain an axisymmetric closed-shape pattern.

To demonstrate the generalization capability of our policy, our training set consists of approximately 5k trajectories solely from the *Easy* track. There are 100 curves of each track for testing.

Evaluation Metrics. In our evaluation process, we utilize various metrics to gauge the quality of our results across different difficulty levels. For the all three tracks, we employ

Methods	Easy			Middle			Hard	
	Chamfer (mm)	Recall@1.5	Recall@5.0	Chamfer (mm)	Recall@1.5	Recall@5.0	Chamfer (mm)	mIoU
Open-loop Planing	10.8	9.3	25.0	6.8	10.5	36.3	18.1	31.2
Online Fitting	5.5	31.4	73.6	5.3	21.0	53.1	10.3	63.0
Ours	1.1	85.1	98.6	1.5	79.6	96.6	1.9	91.3
Oracle	1.4	83.1	98.2	1.4	80.1	98.2	1.9	92.2

TABLE I
COMPARISON WITH NON-LEARNING BASED BASELINES IN SIMULATION.

the chamfer distance as a measure of deviation between the cropped curve and the target curve. Additionally, we report the Recall metric under different thresholds of chamfer distance, indicating the proportion of well-cut instances. For trials completing closed shapes in the *Hard* track, we further assess the quality by calculating the mean Intersection over Union (mIoU) between the cropped pattern and the target pattern, providing a comprehensive measure of similarity and accuracy.

B. Policy Evaluation in Simulation

Non-learning Baselines.

- *Open-loop Planning* detects the target goal curve prior to cutting. Then it discretizes the detected curve into isometric line segments and plans the scissor translation and rotation at each step.
- *Online Fitting* employs a step-by-step line fitting utilizing RANSAC. The fitted line target from the captured point cloud determines the movement distance and scissor rotation at each step.

Learning based Baselines.

- *Direct Pose Regression*. This methodology directly regresses the 7 Degrees of Freedom (DoF) scissor pose (6D Pose and 1D joint angle).
- *Action Chunking* [41]. In this policy, actions for the next k timesteps are predicted. The current action to execute is determined from weighted averages across the previous overlapping action chunk. We adopt the implementation from [41].

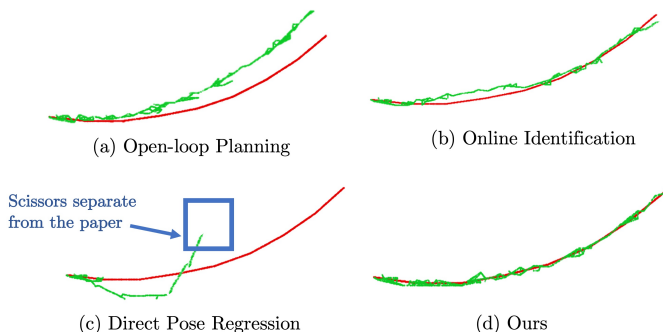


Fig. 7. Visualization of Cutting Results on UV plane of the paper. Target curves are in red while cropped lines by scissors are in green.

Comparison to Non-learning based Baselines. Our method exhibits significantly superior cutting accuracy when compared to non-learning based approaches. As depicted in

Fig. 7, the cutting trajectories of *Open-loop Planning* substantially deviates from the target curve. The reason lies in that *Open-loop Planning* lacks adaptability to environmental changes and accumulates a lot of errors during the highly non-linear interaction between scissors and paper. Although *Online Fitting* demonstrates some adaptability by adjusting its cutting action based on current observations, it falls short of making optimal decisions, particularly in instances of occasional occlusion. In contrast, our learning policy showcases remarkable adaptability to dynamic conditions, resulting in notably precise operations, with a chamfer distance of 1.1 mm compared to 10.8 mm and 5.5 mm for *Open-loop Planning* and *Online Fitting* respectively.

Method	Chamfer (mm)	Recall@1.5	Recall@5.0
Direct Pose Regression	11.2*	9.0*	24.4*
Direct Pose Regression + Action Chunking[41]	11.4*	8.9*	25.1*
Ours	1.1	85.1	98.6
Ours + Action Chunking[41]	1.2	84.2	98.5

TABLE II
COMPARISON WITH LEARNING-BASED BASELINES IN SIMULATION. FOR *Direct pose regression* AND ITS VARIANCE, WE ONLY CALCULATE ITS CHAMBER DISTANCE WITH THE FIRST ONE-THIRD OF THE TARGET CURVE (*).

Effect of the Primitive Learning. The comparison with learning-based baselines exhibits the effectiveness of our primitive learning. As shown in Fig. 7(c), the alternative frequently causes separation between scissors and paper and thus fails to perform the paper-cutting tasks to the end. We only report its chamber distance with the first one-third of the target curve in Tab.II. Even incorporating *Action Chunking*, designed to mitigate compounding errors, there is no substantial improvement in completing the target curves. This is due to the drastic state transitions at each step, which complicate the accurate prediction of future actions. These results highlight the highly nonlinear nature of the task. In contrast, our designed primitive constraints the action space of scissors, which minimizes possible errors during execution.

Generalization to Novel Curves and Patterns. Middle and Hard targets pose additional challenges due to more varied patterns, leading to more complex deformation and fracture during cutting. Despite being trained on the *Easy* track of curves, our policy demonstrates robustness and achieves performance comparable to the oracle policy when handling

Methods	Easy		Middle		Hard	
	Finished Rate	Chamfer (mm)	Finished Rate	Chamfer (mm)	Finished Rate	IoU
Human	10/10	2 ± 1	10/10	2 ± 1	10/10	92 ± 3
Ours w/o Visual Artifact Mimicry	0/10	-	0/10	-	0/10	-
Ours w/o Deviation Correction	7/10	2 ± 1	7/10	3 ± 1	7/10	84 ± 8
Ours	9/10	2 ± 1	8/10	2 ± 1	8/10	89 ± 5

TABLE III
QUANTITATIVE RESULTS IN THE REAL WORLD.

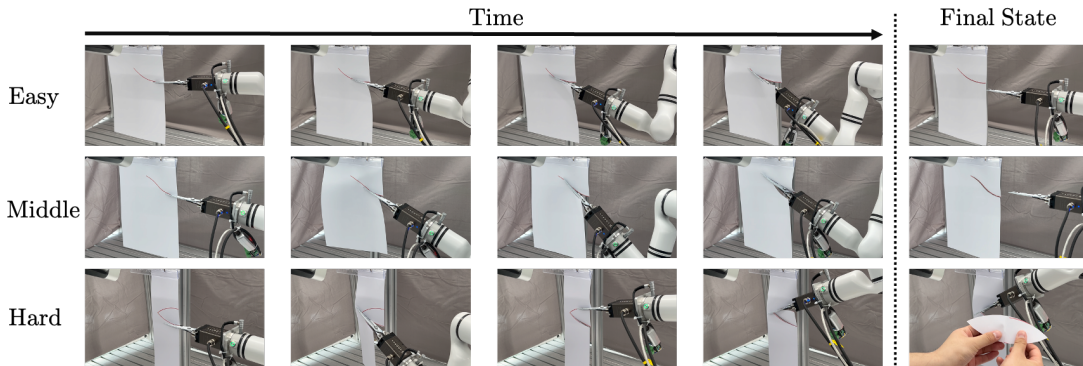


Fig. 8. Realworld cutting process on Easy, Middle and Hard tracks.

Middle and *Hard* targets. This success is due to its generalizability from careful system design.

C. Policy Evaluation in the Real World

We evaluate the performance of our sim2real model on a real-world platform. Quantitative and qualitative results are presented in Table III and Fig. 8, Fig. 10, respectively.

Experiment Details. To understand the capability of our system, we include experimental results from human operations with single hand using standard scissors. We further introduce the concept of *Finished rate*, subjectively defining "Finished" for trials which executes smoothly without falling into tearing, folding, or significant deviation from the target. After each trial for both policy and human, we capture the cropped paper using an RGBD camera and compute metrics such as chamfer distance and IoU. We report the median and extremum of these metrics in the form of $x \pm u$.

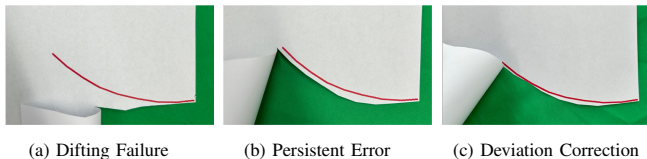


Fig. 9. **Qualitative result of our Deviation Correction.** Without using Deviation Correction, policy trained from simulation frequently falls into drifting failures (a) or keeps persistent errors (b). Our Deviation Correction (c) leads to an accurate and robust deployment.

Result Analysis. As evidenced in Table III, our policy consistently fails without any sim2real, as a result of confused perception with the interactions between blades and paper. Our mimicry strategy mitigates the visual gap and minimizes erratic action prediction, thereby achieving successful deployment. However, the performance is still unsatisfactory. As illustrated in Fig. 9, policies sometimes experience drifting

failures (Fig. 9a) or persistently exhibit errors (Fig. 9b). To this end, the correction mechanism adaptively corrects the deviation and enhances the stability and accuracy of the deployed policy. For example, it enhances the finished rate from 7/10 to 9/10 in the "Easy" track and reduces deviation by 1 mm in the Middle track. Combining the above sim2real techniques, our system achieves comparable performance to human single-hand manipulation under the same condition, which has only 2 mm error from the target curve. Furthermore, it achieves an IoU of 89 on the *Hard* track, which is particularly challenging due to more drastic bending.

V. CONCLUSION, LIMITATIONS AND FUTURE DIRECTIONS

We introduce ScissorBot, the first learning-based robotic system for generalizable paper cutting using scissors. The system utilizes demonstrations collected in our newly developed paper-cutting simulator to train a primitive-based imitation learning policy and combines sim2real techniques to achieve robust deployment in the real world. Extensive experiments exhibit the generalizability and accuracy of our system on simple smooth curves which cover most of cutting scenarios. However, scissor cutting for non-simple or non-smooth curves is still an open problem. Non-smooth curves like zig-zag patterns must result in the sudden relative pose change frequently for scissors while non-simple curves will result in a circle in the scissor trajectory. Both two kinds of scissors' motion can't be achieved considering our single-arm workspace. To solve these challenging situations, it may be a dexterous dual-arm cooperation system containing one arm holding and rotating the paper and the other manipulating scissors. We leave this bimanual hardware system with policy design as future works.

REFERENCES

- [1] David Baraff and Andrew Witkin. Large steps in cloth simulation. In *Seminal Graphics Papers: Pushing the Boundaries, Volume 2*, pages 767–778. 2023.
- [2] Suneel Belkhal, Yuchen Cui, and Dorsa Sadigh. Data quality in imitation learning. *Advances in Neural Information Processing Systems*, 36, 2024.
- [3] Siwei Chen, Yiqing Xu, Cunjun Yu, Linfeng Li, Xiao Ma, Zhongwen Xu, and David Hsu. Daxbench: Benchmarking deformable object manipulation with differentiable physics. In *The Eleventh International Conference on Learning Representations*, 2022.
- [4] Cheng Chi, Siyuan Feng, Yilun Du, Zhenjia Xu, Eric Cousineau, Benjamin Burchfiel, and Shuran Song. Diffusion policy: Visuomotor policy learning via action diffusion. *arXiv preprint arXiv:2303.04137*, 2023.
- [5] Cheng Chi, Benjamin Burchfiel, Eric Cousineau, Siyuan Feng, and Shuran Song. Iterative residual policy: for goal-conditioned dynamic manipulation of deformable objects. *The International Journal of Robotics Research*, 43(4):389–404, 2024.
- [6] Matteo Cianchetti, Cecilia Laschi, Arianna Menciassi, and Paolo Dario. Biomedical applications of soft robotics. *Nature Reviews Materials*, 3(6):143–153, 2018.
- [7] Chuang Gan, Jeremy Schwartz, Seth Alter, Damian Mrowca, Martin Schrimpf, James Traer, Julian De Freitas, Jonas Kubilius, Abhishek Bhandwaldar, Nick Haber, et al. Threedworld: A platform for interactive multimodal physical simulation. In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 1)*, 2021.
- [8] Eitan Grinspun, Anil N Hirani, Mathieu Desbrun, and Peter Schröder. Discrete shells. In *Proceedings of the 2003 ACM SIGGRAPH/Eurographics symposium on Computer animation*, pages 62–67. Citeseer, 2003.
- [9] Eric Heiden, Miles Macklin, Yashraj Narang, Dieter Fox, Animesh Garg, and Fabio Ramos. Disect: A differentiable simulation engine for autonomous robotic cutting. *Robotics: Science and Systems XVII*, 2021.
- [10] Yuanming Hu, Tzu-Mao Li, Luke Anderson, Jonathan Ragan-Kelley, and Frédo Durand. Taichi: a language for high-performance computation on spatially sparse data structures. *ACM Transactions on Graphics (TOG)*, 38(6):201, 2019.
- [11] Jake Levinson, Carlos Esteves, Kefan Chen, Noah Snaveley, Angjoo Kanazawa, Afshin Rostamizadeh, and Ameesh Makadia. An analysis of svd for deep rotation estimation. *Advances in Neural Information Processing Systems*, 33:22554–22565, 2020.
- [12] Xingyu Lin, Yufei Wang, Jake Olkin, and David Held. Softgym: Benchmarking deep reinforcement learning for deformable object manipulation. In *Conference on Robot Learning*, pages 432–448. PMLR, 2021.
- [13] Xingyu Lin, Zhiao Huang, Yunzhu Li, Joshua B Tenenbaum, David Held, and Chuang Gan. Diffskill: Skill abstraction from differentiable physics for deformable object manipulations with tools. In *10th International Conference on Learning Representations, ICLR 2022*, 2022.
- [14] Xingyu Lin, Carl Qi, Yunchu Zhang, Zhiao Huang, Katerina Fragkiadaki, Yunzhu Li, Chuang Gan, and David Held. Planning with spatial-temporal abstraction from point clouds for deformable object manipulation. In *Conference on Robot Learning*, pages 1640–1651. PMLR, 2023.
- [15] Ruoshi Liu, Junbang Liang, Sruthi Sudhakar, Huy Ha, Cheng Chi, Shuran Song, and Carl Vondrick. Paperbot: Learning to design real-world tools using paper, 2024.
- [16] Xiaoqian Mu, Yuechuan Xue, and Yan-Bin Jia. Robotic cutting: Mechanics and control of knife motion. In *2019 International Conference on Robotics and Automation (ICRA)*, pages 3066–3072. IEEE, 2019.
- [17] Xiaoqian Mu, Yuechuan Xue, and Yan-Bin Jia. Dexterous robotic cutting based on fracture mechanics and force control. *IEEE Transactions on Automation Science and Engineering*, 2023.
- [18] Akio Namiki and Shuichi Yokosawa. Robotic origami folding with dynamic motion primitives. In *2015 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 5623–5628. IEEE, 2015.
- [19] Kaarlo Niskanen. Strength and fracture of paper. *Products of Papermaking*, 2:641–725, 1993.
- [20] Sang-Ho Park, Ga-Rin Park, and Kwang-Ryul Baek. Edge bleeding artifact reduction for shape from focus in microscopic 3d sensing. *Sensors*, 23(20):8602, 2023.
- [21] Tobias Pfaff, Rahul Narain, Juan Miguel De Joya, and James F O’Brien. Adaptive tearing and cracking of thin sheets. *ACM Transactions on Graphics (TOG)*, 33(4):1–9, 2014.
- [22] Dean A Pomerleau. Alvin: An autonomous land vehicle in a neural network. *Advances in neural information processing systems*, 1, 1988.
- [23] Charles Ruizhongtai Qi, Li Yi, Hao Su, and Leonidas J Guibas. Pointnet++: Deep hierarchical feature learning on point sets in a metric space. *Advances in neural information processing systems*, 30, 2017.
- [24] Zenan Qi, David K Campbell, and Harold S Park. Atomistic simulations of tension-induced large deformation and stretchability in graphene kirigami. *Physical Review B*, 90(24):245437, 2014.
- [25] Paul Maria Scheickl, Nicolas Schreiber, Christoph Haas, Niklas Freymuth, Gerhard Neumann, Rudolf Lioutikov, and Franziska Mathis-Ullrich. Movement primitive diffusion: Learning gentle robotic manipulation of deformable objects. *IEEE Robotics and Automation Letters*, 2024.
- [26] Daniel Seita, Aditya Ganapathi, Ryan Hoque, Minho Hwang, Edward Cen, Ajay Kumar Tanwani, Ashwin Balakrishna, Brijen Thananjeyan, Jeffrey Ichnowski, Nawid Jamali, et al. Deep imitation learning of sequential fabric smoothing from an algorithmic supervisor. in 2020 IEEE. In *RSJ International Conference on Intelligent Robots*

and Systems (IROS), pages 9651–9658.

[27] RS Seth and DH Page. Fracture resistance of paper. *Journal of Materials Science*, 9:1745–1753, 1974.

[28] Tao Shen. Analysis of symbolic meanings of folk paper-cut from the perspective of semiotics. In *Proceedings of the 2018 2nd International Conference on Management, Education and Social Science (ICMESS 2018)*, pages 67–69. Atlantis Press, 2018/06. ISBN 978-94-6252-520-7. doi: 10.2991/icmess-18.2018.14. URL <https://doi.org/10.2991/icmess-18.2018.14>.

[29] Hiroki Shigemune, Shingo Maeda, Yusuke Hara, Uori Koike, and Shuji Hashimoto. Kirigami robot: Making paper robot using desktop cutting plotter and inkjet printer. In *2015 IEEE/RSJ international conference on intelligent robots and systems (IROS)*, pages 1091–1096. IEEE, 2015.

[30] M. Sullivan. *Art and Artists of Twentieth-Century China*. University of California Press, 2023. ISBN 9780520911611. URL https://books.google.com.hk/books?id=G0_hEAAAQBAJ.

[31] Florence Temko. *Kirigami Home Decorations*. Tuttle Publishing, 2012.

[32] Weikang Wan, Haoran Geng, Yun Liu, Zikang Shan, Yaodong Yang, Li Yi, and He Wang. Unidexgrasp++: Improving dexterous grasping policy learning via geometry-aware curriculum and iterative generalist-specialist learning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 3891–3902, 2023.

[33] Yian Wang, Juntian Zheng, Zhehuan Chen, Zhou Xian, Gu Zhang, Chao Liu, and Chuang Gan. Thin-shell object manipulations with differentiable physics simulations. *arXiv preprint arXiv:2404.00451*, 2024.

[34] Zifan Wang, Junyu Chen, Ziqing Chen, Pengwei Xie, Rui Chen, and Li Yi. Genh2r: Learning generalizable human-to-robot handover via scalable simulation, demonstration, and imitation. *arXiv preprint arXiv:2401.00929*, 2024.

[35] Ruihai Wu, Chuanruo Ning, and Hao Dong. Learning foresightful dense visual affordance for deformable object manipulation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 10947–10956, 2023.

[36] Tong Xin, Pieran Marris, Ana Mihut, Gary Ushaw, and Graham Morgan. Accurate real-time complex cutting in finite element modeling. In *VISIGRAPP (1: GRAPP)*, pages 183–190, 2018.

[37] Zhenjia Xu, Zhou Xian, Xingyu Lin, Cheng Chi, Zhiao Huang, Chuang Gan, and Shuran Song. Roboninja: Learning an adaptive cutting policy for multi-material objects. *arXiv preprint arXiv:2302.11553*, 2023.

[38] Yi Yang, Katherine Vella, and Douglas P Holmes. Grasping with kirigami shells. *Science Robotics*, 6(54): eabd6426, 2021.

[39] Qiuting Zhang, Jonathon Wommer, Connor O’Rourke, Joseph Teitelman, Yichao Tang, Joshua Robison, Gaojian Lin, and Jie Yin. Origami and kirigami inspired self-folding for programming three-dimensional shape shift-

ing of polymer sheets with light. *Extreme Mechanics Letters*, 11:111–120, 2017.

[40] Chao Zhao, Chunli Jiang, Junhao Cai, Michael Yu Wang, Hongyu Yu, and Qifeng Chen. Flipbot: Learning continuous paper flipping via coarse-to-fine exteroceptive-proprioceptive exploration. In *2023 IEEE International Conference on Robotics and Automation (ICRA)*, pages 10282–10288. IEEE, 2023.

[41] Tony Z Zhao, Vikash Kumar, Sergey Levine, and Chelsea Finn. Learning fine-grained bimanual manipulation with low-cost hardware. *arXiv preprint arXiv:2304.13705*, 2023.

APPENDIX

A. More Qualitative Results

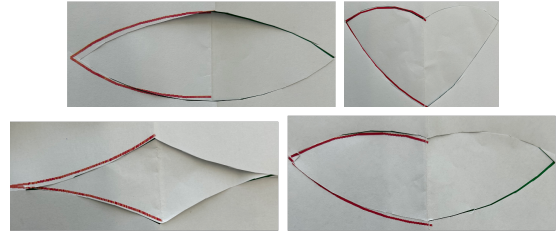


Fig. 10. **Realworld results on patterns from Hard tracks.** The cropped pattern from our system has a accurate overlap with the target pattern.

B. Ablation Studies

Basic length (mm)	Steps	Chamfer (mm)
20	~ 29	1.9
15	~ 37	1.4
10	~ 53	1.3

TABLE IV
EFFECTS OF DISCRETIZATION GRANULARITY FOR CURVES, I.E, THE BASIC LENGTH OF LINE SEGMENTS.

Horizon	Chamfer(mm)	Recall@1.5	Recall@5.0
w/o multi-frame	1.5	74.4	94.2
$L = 2$	1.6	70.4	93.1
$L = 4$	1.1	85.1	98.6
$L = 6$	1.1	85.4	98.9

TABLE V
ABLATION STUDY OF TEMPORAL ENCODING AND OBSERVATION HORIZON.

Filter	Data usage	Chamfer(mm)	Recall@1.5	Recall@5.0
w/o filtering	100%	1.7	74.5	92.5
$\tau = 1.6$	~ 90%	1.4	81.8	97.8
$\tau = 1.0$	~ 70%	1.1	85.1	98.6
$\tau = 0.7$	~ 30%	1.1	85.0	98.6

TABLE VI
ABLATION STUDY ON THE FILTERING THRESHOLD τ .

In this section, we conduct experiments to analyze the effects of critical parameters and design choices.

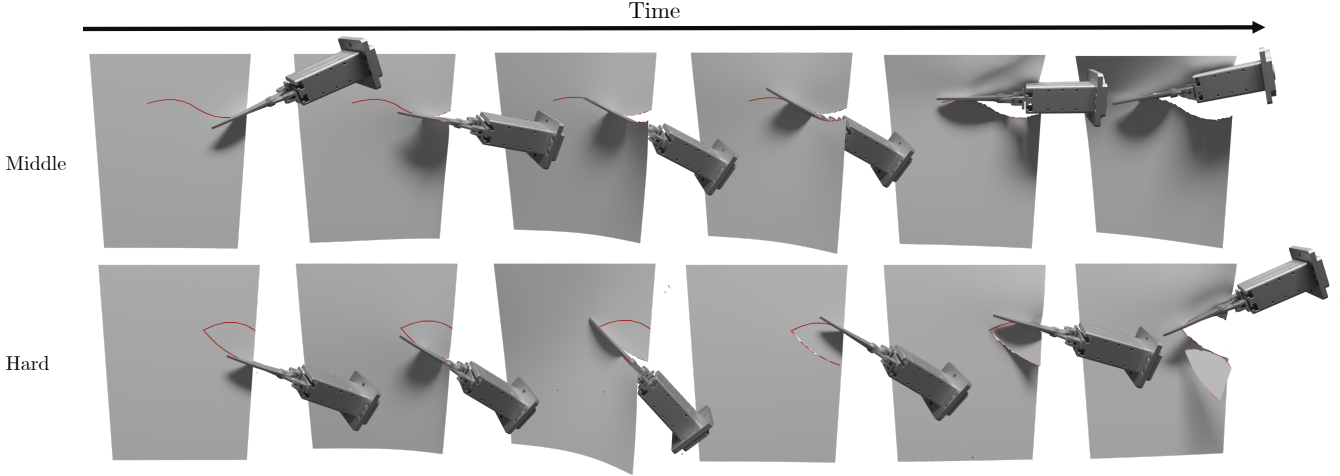


Fig. 11. Cutting process of our method in the simulation on Middle and Hard tracks.

Discretization Granularity. During the generation of expert data, smooth curves are discretized into line segments as an approximation. We aim to study the impact of discretization granularity on efficiency and quality, as reported in Table IV. It’s evident that as the length of each line segment decreases, the number of execution steps increases while the quality improves. When the basic length decreases from 15 mm to 10 mm, the reduction in chamfer distance is marginal, merely 0.1 mm. Thus, we opt for a trade-off choice of 15 mm, with a balance between efficiency and quality.

Observation Horizon (L). We analyze the effect of different observation horizons, as detailed in Table V. Policies with 4 or 6 frame horizons outperform that without temporal inputs by approximately 10 points on Recall@1.5. The superiority of our spatial-temporal encoding lies in its robustness to occlusion and deformable dynamics. Although increasing the horizon from 4 to 6 yields marginal improvements in cutting quality, e.g., 0.3 for Recall@1.5, we opt for a horizon of 4 in our system to maintain a favorable balance between performance and efficiency.

Filtering Threshold (τ). We train our imitation policy using various demonstration filtering thresholds ranging from 0.7 to 1.6, as well as no filtering, as summarized in Table VI. A stricter threshold yields better performance and a lower data usage rate, necessitating the generation of more demonstrations for distillation. In our system, we select $\tau = 1.0$ to strike a balance between data quality and efficiency.

We consider the occurrence of paper fractures due to the intersection of the scissor blades. As the scissors close, the intersection point of the two blades, denoted as \mathbf{P} , moves along the paper surface. The trajectory of this movement forms the fracture line on the paper. At each time step, we detect this moving trajectory on the paper mesh and perform remeshing, which includes vertex insertion, edge connection, and edge splitting.

New Vertex Insertion: For each time step t , the movement of \mathbf{P} can be represented as a segment $E = (\mathbf{P}_t, \mathbf{P}_t - \alpha \mathbf{V}_t)$, where α is the velocity and \mathbf{V} is the cutting direction of the

scissors. Performing edge-edge detection between E and the paper mesh M will yield most intersection points. For the endpoints of E , they may not be located at an existing edge, so we also perform vertex-face detection to get the intersection points. We insert all the intersection points as new vertices in order.

New Edge Connection. With the insertion of vertices, we perform edge connection. For a newly inserted vertex on an existing edge, we connect it to the opposite vertices in all triangles containing that edge. For a newly inserted vertex inside a triangle but not on the edge, we connect it with three vertices of the triangle.

Edge Splitting: For each newly connected edge, if its two endpoints are newly inserted vertices, then this edge need to be splitter.

The action parameters are computed through relative pose between scissors (blade intersection P_t and cutting direction \mathbf{V}_t) and target line segment ($\mathbf{Tar}_t^k = (s_t^k, s_t^{k+1})$) for each step t .

When t is the step for *Push*, the pushing distance p_t is computed as :

$$p_t = \frac{(s_t^k - P_t) \cdot \mathbf{V}_t}{\|\mathbf{V}_t\|^2} \mathbf{V}_t \quad (2)$$

When t is the step for *Rotate*, the Rotation \mathbf{R}_t is computed using Rodrigues’ rotation formula:

$$\mathbf{w} = \mathbf{V}_t \times \mathbf{Tar}_t^k \quad (3)$$

$$\theta = \cos^{-1}(\mathbf{V}_t \cdot \mathbf{Tar}_t^k) \quad (4)$$

$$\mathbf{K} = \begin{bmatrix} 0 & -w_z & w_y \\ w_z & 0 & -w_x \\ -w_y & w_x & 0 \end{bmatrix} \quad (5)$$

$$\mathbf{R}_t = \mathbf{I} + \sin \theta \mathbf{K} + (1 - \cos \theta) \mathbf{K}^2 \quad (6)$$

where \mathbf{I} is the identity matrix. When t is the step for *Close*, the closed angle c_t is computed as :

$$c_t = \text{Distance2Angle}\left(\frac{(s_t^{k+1} - P_t) \cdot \mathbf{V}_t}{\|\mathbf{V}_t\|^2} \mathbf{V}_t\right) \quad (7)$$

where `Distance2Angle` is a function to map the cutting distance to the closed angle. The function is depended on the mechanical structure of scissors and we obtain it via real-world calibration.

We consider the generation of curves in the uv space of the paper. In each track, curves are generated using Bézier curves parameterized by four control points, which are equidistant along the u -axis. By connecting these four points with three line segments, we can compute the gradients of these lines. We approximate the second-order derivatives of the curve by calculating the differences in gradients between these lines. For the *Easy* track, the gradient differences are always either positive or negative, ensuring a consistent curve direction. For the *Middle* track, the gradient differences include both positive and negative values, creating more complex curves. Considering the robotic arm workspace, scissors cannot undergo significant rotations, i.e., exceeding 90° , relative to the initial orientation along the moving trajectory. Empirically, we constrain the gradient of the first line to be within $[-\tan(40^\circ), \tan(40^\circ)]$ and the gradient of the last line within $[-\tan(60^\circ), \tan(60^\circ)]$.

The sequential point cloud features from the PointNet++ encoder are concatenated and fed into three action heads. Each action head is a shallow MLP with the shape of $[L \times 512 - 256 - 64 - a]$, where L is the length of the observation horizon and a is the dimension of the action parameter. We train the model from scratch for 120,000 iterations. The learning rate is initialized at 1×10^{-4} and decays by a factor of 0.1 at 60,000 and 110,000 iterations, respectively.

For Action Chunking, we follow the implementation of [41], which predicts k future actions using an exponential weighting scheme where $w_i = e^{-m \times i}$, with w_0 representing the weight for the most recent action. In our experiments, we set $k = 4$ and $m = 0.01$.